




Doric Smooth Tapered IPDOR1016S-FG FRP-PolyComp™

Doric Capital ArchPolymer™

Diagonal
28"
71cm

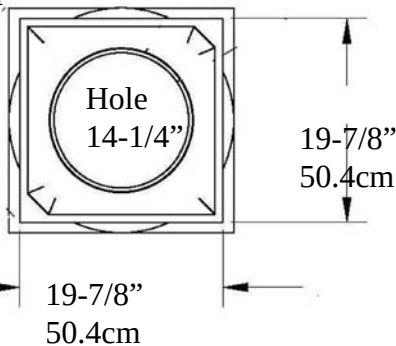

Cap 5-3/8" (13.6cm) =>

Top of Shaft
Minimum
Inside Diameter
12" (30.48cm)

Outside Diameter
13-7/8" (35.2cm)

Bottom of Column
Outside Diameter
15-1/2"
39.3cm


<=

Total
Height

10 Feet
120"
3.048m

Attic Base ArchPolymer™

29-7/8"
75.8cm

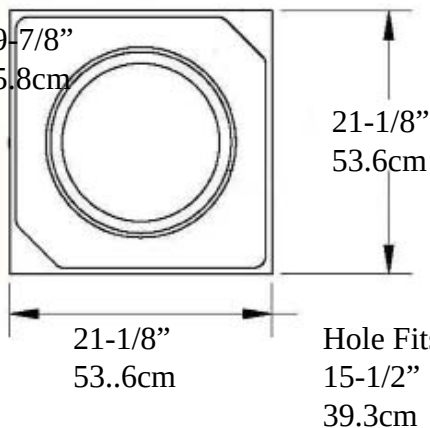


Hole Fits
15-1/2"
39.3cm

Taper Ends @
24"
60.96
from bottom of shaft

Weight Shaft
189 lb (85.7 Kg)
Center Loads to
20,000lbs (9.07m tons)

Imperial
Productions

Optional Cuts

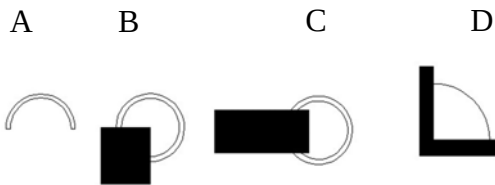

A= Half column

B = 3/4 Outside Corner

C = Wall Cover Engaged

D = 1/4 Column Inside Corner

E = Engaged any percentage

Base & Plinth
10-1/8" (25.7cm)

=>

=>

<=

- * assembly required, drawing not to scale Loads must be Centered on the Shaft
- * Sold as a building Component - Intergration Hardware by others
- * For Load Application check with your structural engineer for suitability in your local area
- * All specifications subject to change without notice, Final products & Measurements may vary from this brochure E/OE



Imperial Productions®

1-800-399-7585 +1-416-264-6096

Imperial Productions & Distribution Inc

email sales@imperialproductions.com copyright 2016 MRDCI All Rights Reserved

SEP-25



Custom Request (Download & Fill-in)

emailto sales@imperialproductions.com IPDOR1016S

Name _____

Contact: _____

Phone # _____

Email: _____

Address _____
_____ ZIP/PC _____

FRP-PolyComp™ A Composite Gypsum, Fiberglass, Marble Chips, Prime & Paint by others

(Interior/Exterior)

of Whole Units _____ # of Split Units _____

Type of Split enter Letter _____

Optional Cuts

A

B

C

D



A= Half column

B = 3/4 Outside Corner

C = Wall Cover Engaged

D = 1/4 Column Inside Corner

E = Engaged any percentage

* Possible Limitations due to Quantity Requested and/or Application



Imperial Productions®

1-800-399-7585 +1-416-264-6096

Imperial Productions & Distribution Inc.

email sales@imperialproductions.com copyright 2016 MRDCI All Rights Reserved