




Doric Tapered IPDOR1622S-FG

Fiberglass

Doric Capital ArchPolymer

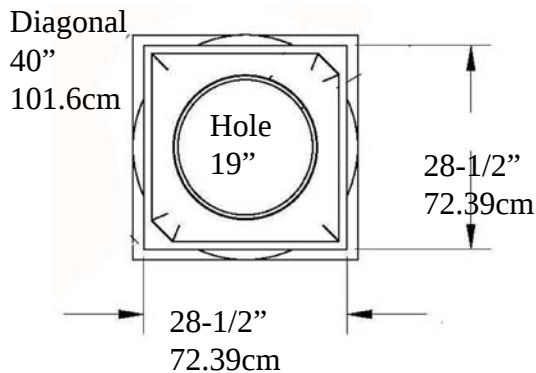


Cap 7-3/8" (18.7cm)=>

Top of Shaft
Minimum
Inside Diameter
16-1/2" (41.9cm)

Outside Diameter
18-1/2" (46.9cm)


Attic Base ArchPolymer™

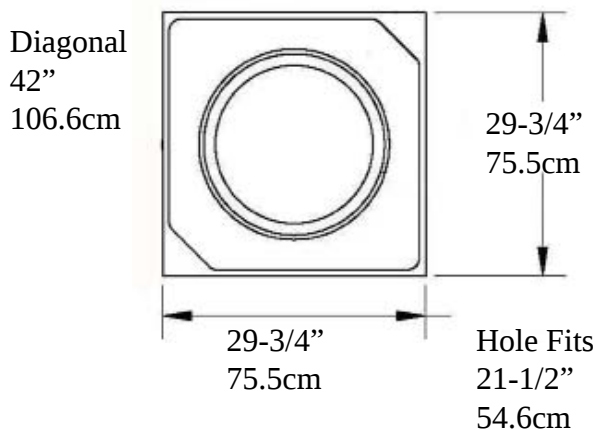

Bottom of Column
Outside Diameter
21-1/2"
54.6cm


Center Loads to
20,000lbs (9.07m tons)

Optional Cuts

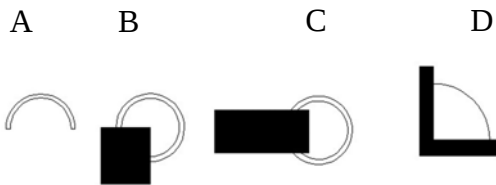

A= Half column
B = 3/4 Outside Corner
C = Wall Cover Engaged
D = 1/4 Column Inside Corner
E = Engaged any percentage

Base & Plinth
14-1/4" (36.1cm)

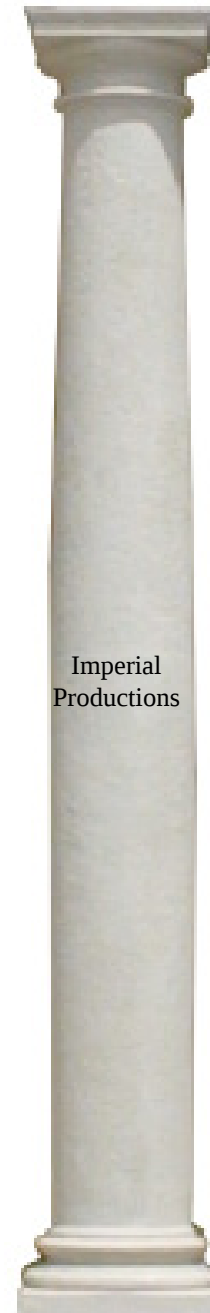

<= |
Total
Height
16 Feet
4.876m

- * assembly required, drawing not to scale Loads must be Centered on the Shaft
- * Sold as a building Component - Intergration Hardware by others
- * For Load Application check with your structural engineer for suitability in your local area
- * All specifications subject to change without notice, Final products & Measurements may vary from this brochure E/OE



Imperial Productions®

Imperial Productions & Distribution Inc

email sales@imperialproductions.com

1-800-399-7585 +1-416-264-6096

copyright 2016 MRDCI All Rights Reserved

SEP-25



Custom Request (Download & Fill-in)

emailto sales@imperialproductions.com IPDOR1622S

Name _____

Contact: _____

Phone # _____

Email: _____

Address _____
_____ ZIP/PC _____

FRP-PolyComp™ A Composite Gypsum, Fiberglass, Marble Chips, Prime & Paint by others

(Interior/Exterior)

of Whole Units _____ # of Split Units _____

Type of Split enter Letter _____

Optional Cuts

A

B

C

D



A = Half column

B = 3/4 Outside Corner

C = Wall Cover Engaged

D = 1/4 Column Inside Corner

E = Engaged any percentage

* Possible Limitations due to Quantity Requested and/or Application



Imperial Productions®

1-800-399-7585 +1-416-264-6096

Imperial Productions & Distribution Inc.

email sales@imperialproductions.com copyright 2016 MRDCI All Rights Reserved