
## Doric Tapered IPDOR2030S-FG Fiberglass



Weight Shaft 470 lb (213.19 Kg) Centered Load to 20,000lbs (9.07m tons)

- \* assembly required, drawing not to scale Loads must be Centered on the Shaft
- \* Sold as a building Component Intergration Hardware by others
- \* For Load Application check with your structural engineer for suitability in your local area
- \* All specifications subject to change without notice, Final products & Measurements may vary from this brochure E/OE

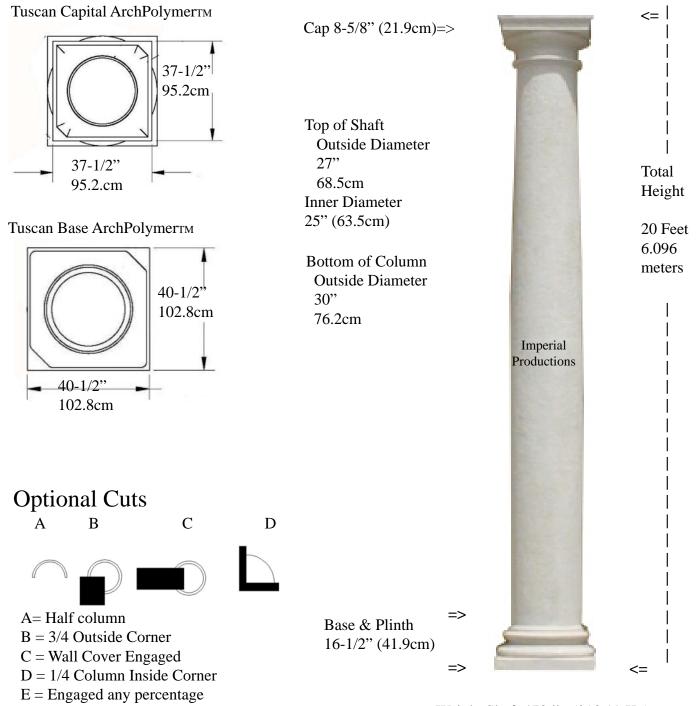

Name	
Contact:	
Phone #	
Email:	
Address	
FRP-PolyComptm A Composite Gypum, F	iberglass, Marble Chips, Prime & Paint by others
(Interior/Exterior)	
# of Whole Units	# of Split Units
	Type of Split enter Letter

**Optional Cuts** 

A B C D



A= Half column

B = 3/4 Outside Corner

C = Wall Cover Engaged

D = 1/4 Column Inside Corner

E = Engaged any percentage

<sup>\*</sup> Possible Limitations due to Quantity Requested and/or Application

