




Tuscan Tapered Smooth Column

IPTUS1010S FiberComp™

Tuscan Capital ArchPolymert™

15-1/2"
39.3cm

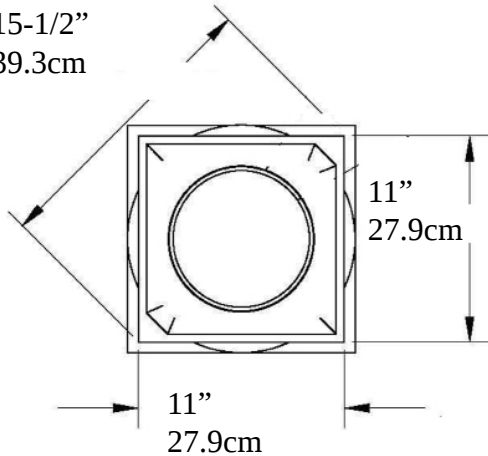

Cap 3" (7.62cm)=>


Top of Shaft
Outside Diameter
7-1/2" (19cm)

Minimum
Inside Diameter
6-1/4" (15.8cm)

<= |
Total Height
10 Feet
(120")

Tuscan Base ArchPolymert™

18-3/8"
46.6cm

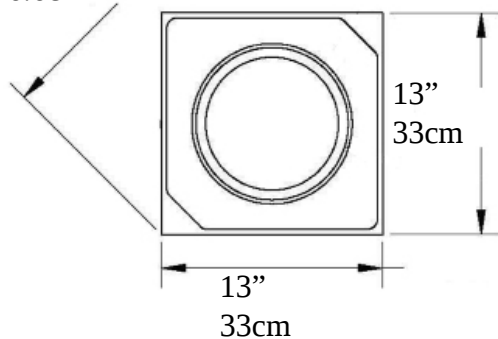

Taper Ends
from Bottom
40"
101.6cm

Bottom of Column
Outside Diameter
9-5/8"
24.4cm

3.04 meter

Optional Cuts

A B C D



A = Half column

B = 3/4 Outside Corner

C = Wall Cover Engaged

D = 1/4 Column Inside Corner

E = Engaged any percentage

Base & Plinth
5" (12.7cm)

Weight 100 lbs (45.3 Kg)

Load Bearing Centered 14,000lbs (6.35mt)

* assembly required, drawing not to scale Loads must be Centered on the Shaft

* Sold as a building Component - Intergration Hardware by others

* For Load Application check with your structural engineer for suitability in your local area

* All specifications subject to change without notice, Final products & Measurements may vary from this brochure E/OE



Imperial Productions®

Imperial Productions & Distribution Inc

email sales@imperialproductions.com

1-800-399-7585 +1-416-264-6096

copyright 2016 MRDCI All Rights Reserved

SEP-25



Custom Request (Download & Fill-in)

emailto sales@imperialproductions.com IPTUS1010S

Name _____

Contact: _____

Phone # _____

Email: _____

Address _____
_____ ZIP/PC _____

FRP-PolyComp™ A Composite Gypsum, Fiberglass, Marble Chips, Prime & Paint by others

(Interior/Exterior)

of Whole Units _____ # of Split Units _____

Type of Split enter Letter _____

Optional Cuts

A

B

C

D



A = Half column

B = 3/4 Outside Corner

C = Wall Cover Engaged

D = 1/4 Column Inside Corner

E = Engaged any percentage

* Possible Limitations due to Quantity Requested and/or Application



Imperial Productions®

1-800-399-7585 +1-416-264-6096

Imperial Productions & Distribution Inc.

email sales@imperialproductions.com copyright 2016 MRDCI All Rights Reserved