




Tuscan Tapered Smooth Column

IPTUS1012S FRP-PolyComp™

Tuscan Capital ArchPolymert™

Diagonal
18-3/4"
47.6cm

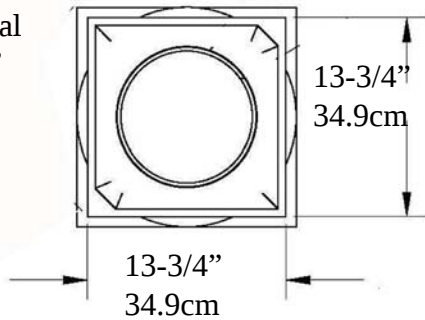


Cap 4" (10cm)=>

Top of Shaft
Outside Diameter
9-1/4" (24.4cm)

Minimum
Inside Diameter
8" (20.3cm)

Tuscan Base ArchPolymert™

Diagonal
23-1/4"
59cm

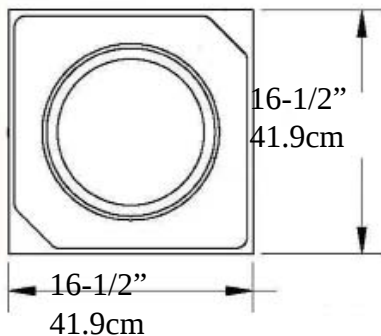

Taper Ends
from Bottom
40"
101.6cm


<=

Total
Height

10 Feet
(120")

3.04 meter

Optional Cuts

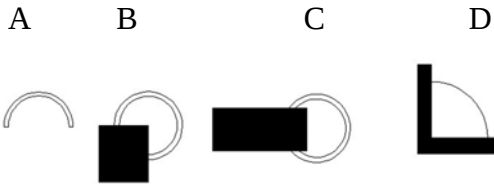

- A= Half column
- B = 3/4 Outside Corner
- C = Wall Cover Engaged
- D = 1/4 Column Inside Corner
- E = Engaged any percentage

Bottom of Column
Outside Diameter
11-5/8"
29.5cm

Base & Plinth
6" (15.2cm)

=>

=>



<=

Weight 132 lb (59.8 Kg)
Load o/c to 18,000lbs (8.16m tons)

- * assembly required, drawing not to scale Loads must be Centered on the Shaft
- * Sold as a building Component - Intergration Hardware by others
- * For Load Application check with your structural engineer for suitability in your local area
- * All specifications subject to change without notice, Final products & Measurements may vary from this brochure E/OE



Imperial Productions®

Imperial Productions & Distribution Inc

email sales@imperialproductions.com

1-800-399-7585 +1-416-264-6096

copyright 2016 MRDCI All Rights Reserved

SEP-25



Custom Request (Download & Fill-in)

emailto sales@imperialproductions.com IPTUS1012S

Name _____

Contact: _____

Phone # _____

Email: _____

Address _____
_____ ZIP/PC _____

FRP-PolyComp™ A Composite Gypsum, Fiberglass, Marble Chips, Prime & Paint by others

(Interior/Exterior)

of Whole Units _____ # of Split Units _____

Type of Split enter Letter _____

Optional Cuts

A

B

C

D



A= Half column

B = 3/4 Outside Corner

C = Wall Cover Engaged

D = 1/4 Column Inside Corner

E = Engaged any percentage

* Possible Limitations due to Quantity Requested and/or Application



Imperial Productions®

1-800-399-7585 +1-416-264-6096

Imperial Productions & Distribution Inc.

email sales@imperialproductions.com copyright 2016 MRDCI All Rights Reserved