Tuscan Smooth Square IPTUSQ0910S-TCTB

Fiberglass

Shaft (A) 9-1/2" x 9-1/2" 24.13 x 24.13cm Capital Width & Depth (C1) 12-7/8" x 12-7/8" (32.7 x 32.7cm)

Capital Height (C2) 3-5/8" (9.2cm)


Base Width & Depth (B1) 13-1/8" x 13-1/8" (33.3 x 33.3cm) Base Height (B2) 5-1/4" (13.3cm)


Weight 41 lb (18.6 kg) Load Bearing to 10,000 (4.53 metric tons) Load must be distributed evenly over the shaft

Minimum Inside 8" x 8" (20.3cm x 20.3cm)

Priming & Painting by others

Optional Split for Post Wrap

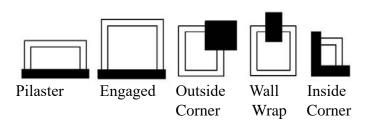

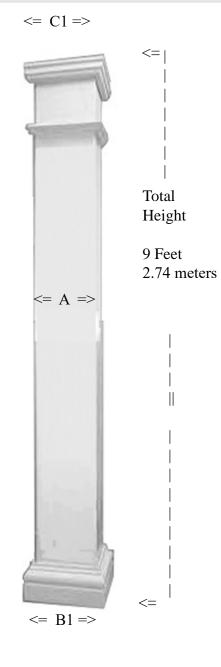

- * Assembly required, drawing not to scale, final measurements may vary due to manufacturing tolerences
- * For Load Bearing Application, consult with your structural engineer for suitability in your local area sold as unfinished building components integration hardware by others * All specifications subject to change without notice

B2 =>

Request for Quote IPTUSQ0910S Download and Auto Fill PDF

Name / Company	
Phone	_ Email
Billing Address	
City	State / Prov
ZIP / PCode	
Ship to Address	
City	State / Prov
ZIP / PCode	
Quantity Whole	-
Split Post Wrap Split for	r Pilaster
Split for Engaged	Split Wall Wrap
Split Outside Corner	Split Inside Corner
NI - 4	
Note:	