



Attic Base IPAB900-BASE



Hollow Bases
Designed to have
Shaft sitting on the
Flat Substrate
Made in 2 parts Split

Materials

ArchPolymer™

an artificial wood primed white easy to install with the approved adhesive and a brad nailer. Finish joining edges with poly spackling compound. Optional Class A fire rating available. Exterior & Interior use

GRG-NeoPlaster™


Much stronger than tradiitonal plaster Class A fire rated product. Screw & glue into place. Priming by others. Interior use.

Zeament™

A heavy concrete based composite
Class A Fire Rated - Interior & Exterior Use

Hole 30-3/4" (78cm)

Top Diameter 31-3/4" (1" Ridge)

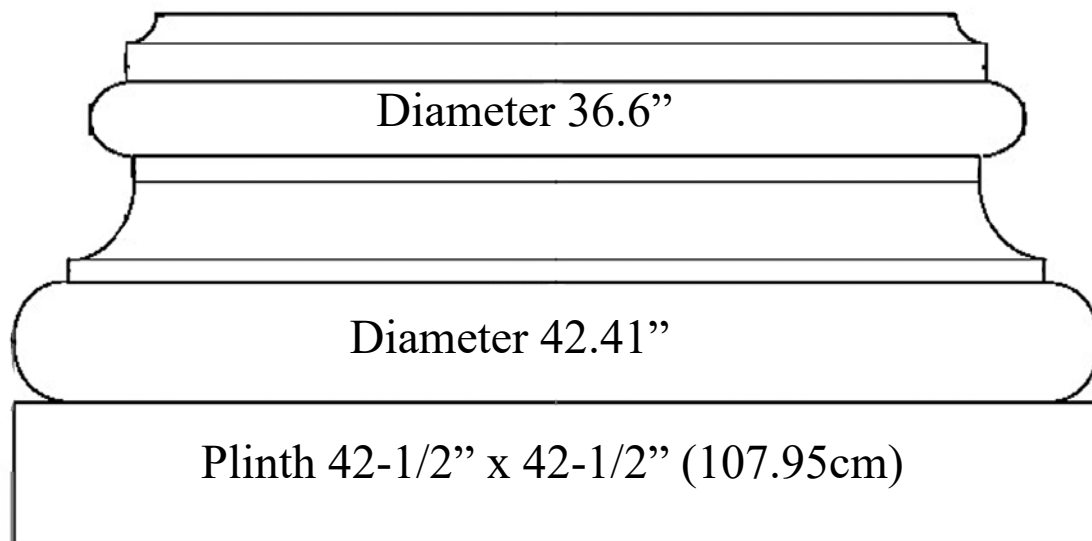

Torus
13-1/4"
33.6cm

Plinth
5-3/4"
14.5cm

* All specifications subject to change without notice,
Final products & Measurements may vary from this brochure Manufacturing tolerences +/- 1/8" (.31cm)



Imperial Productions®

Imperial Productions & Distribution Inc.

email sales@imperialproductions.com copyright 2016 MRDCI All Rights Reserved

1-800-399-7585 +1-416-264-6096

JUL-26



Custom Request (Download & Fill-in)

emailto sales@imperialproductions.com

IPAB900

Name _____

Date: _____

Contact: _____



Phone # _____

Email: _____

Address _____
_____ ZIP/PC _____

Torus # of Units _____ A) whole B) split enter letter _____

Plinth # of Units _____ A) whole B) split enter letter _____

MATERIAL SELECTION

ArchPolymer™ High Density Polyurethane, Prime & Paint by Others (Interior/Exterior)

of Unit _____ for Residential

of FireRated Units _____ for Commercial Interior

GRG-NeoPlaster™ A new age plaster, Class A fire rated (Interior)

of Units _____

GFRC-Zeament™ A Concrete Composite (Exterior)

of Units _____

VALUE ADDED FINISHES

Factory Paint Color Code _____ Finish _____

Metal Coated: Type: _____

* Possible Limitations due to Quantity Requested and/or Application



Imperial Productions®

1-800-399-7585 +1-416-264-6096

Imperial Productions & Distribution Inc.

email sales@imperialproductions.com copyright 2016 MRDCI All Rights Reserved