




Doric Smooth Tapered

IPDOR0508S-FG

FRP-PolyComp™

Doric Capital ArchPolymert™

13-3/16"
33.5cm

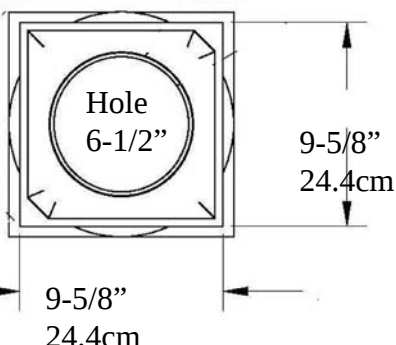


Cap 3" (7.6cm)=>

Top of Shaft
Outside Diameter
6-1/4" (15.8cm)
Minimum
Inside Diameter
5" (12.7cm)

Attic Base ArchPolymert™

14-11/16"
37.3cm

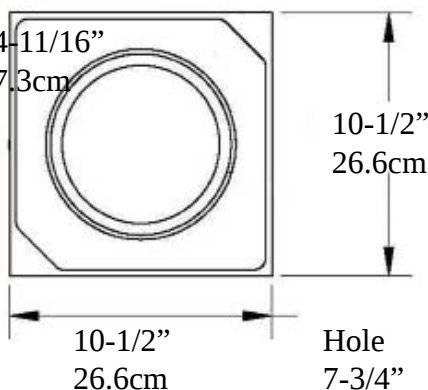


Bottom of Column
Outside Diameter
7-5/8"
19.3cm

Weight Shaft
38 lb (17.2 Kg)

Centered Load to
10,000lbs (4.53m tons)

Optional Cuts

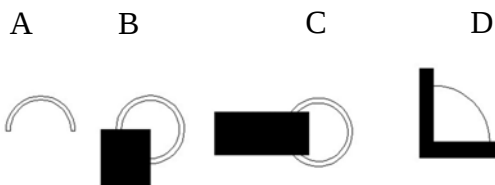

A= Half column


B = 3/4 Outside Corner

C = Wall Cover Engaged

D = 1/4 Column Inside Corner

E = Engaged any percentage

Base & Plinth
4-3/8" (37.3cm)

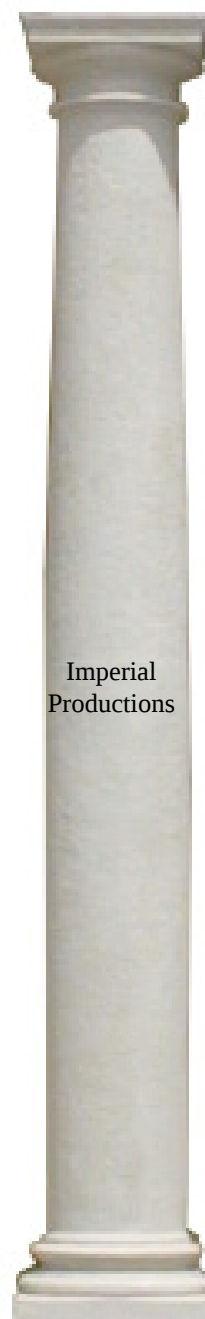

<=

Total
Height

5 Feet
(60")

1.52 metre

<=

* assembly required, drawing not to scale Loads must be Centered on the Shaft

* Sold as a building Component - Intergration Hardware by others

* For Load Application check with your structural engineer for suitability in your local area

* All specifications subject to change without notice, Final products & Measurements may vary from this brochure E/OE



Imperial Productions®

1-800-399-7585 +1-416-264-6096

Imperial Productions & Distribution Inc

email sales@imperialproductions.com copyright 2016 MRDCI All Rights Reserved



Custom Request (Download & Fill-in)

emailto sales@imperialproductions.com IPDOR0508S

Name _____

Contact: _____

Phone # _____

Email: _____

Address _____
_____ ZIP/PC _____


FRP-PolyComp™ A Composite Gypsum, Fiberglass, Marble Chips, Prime & Paint by others

(Interior/Exterior)

of Whole Units _____ # of Split Units _____

Type of Split enter Letter _____

Optional Cuts

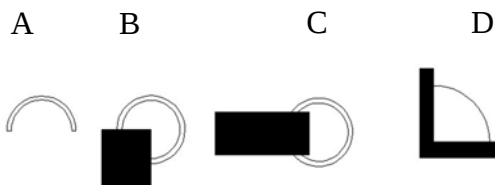

A = Half column

B = 3/4 Outside Corner

C = Wall Cover Engaged

D = 1/4 Column Inside Corner

E = Engaged any percentage

* Possible Limitations due to Quantity Requested and/or Application



Imperial Productions®

1-800-399-7585 +1-416-264-6096

Imperial Productions & Distribution Inc.

email sales@imperialproductions.com copyright 2016 MRDCI All Rights Reserved