




Doric Smooth Tapered IPDOR0810S-FG FRP-PolyComp™

Doric Capital ArchPolymer

15-3/8"
40.3cm

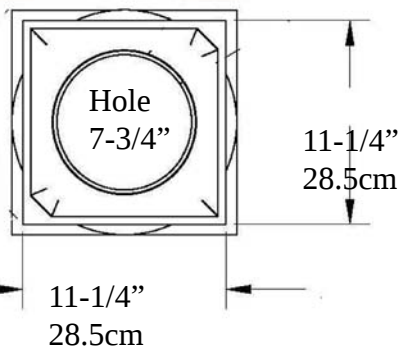

Cap 3-3/8" (8.5cm)=>

Top of Shaft
Minimum
Inside Diameter
6-1/4" (15.8cm)

Outside Diameter
7-1/2" (19cm)

Bottom of Shaft
Outside Diameter
9-5/8"
24.4cm


<=

Total
Height

8 Feet
96"
2.43m

Attic Base ArchPolymer™

18-5/16"
46.6cm

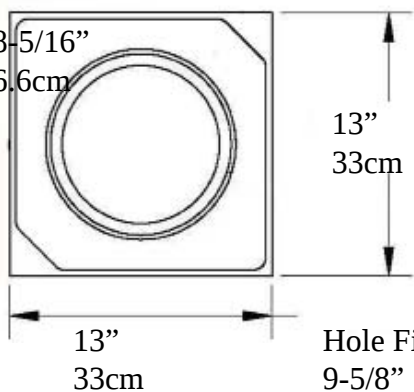


Hole Fits
9-5/8"
29.5cm

Weight Shaft
72 lb (32.6 Kg)
Center Loads to
14,000lbs (6.35m tons)

Imperial
Productions

Optional Cuts

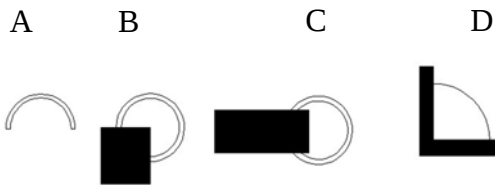

A= Half column

B = 3/4 Outside Corner

C = Wall Cover Engaged

D = 1/4 Column Inside Corner


E = Engaged any percentage

Base & Plinth
5-1/2" (13.9cm)

=>

=>

<=

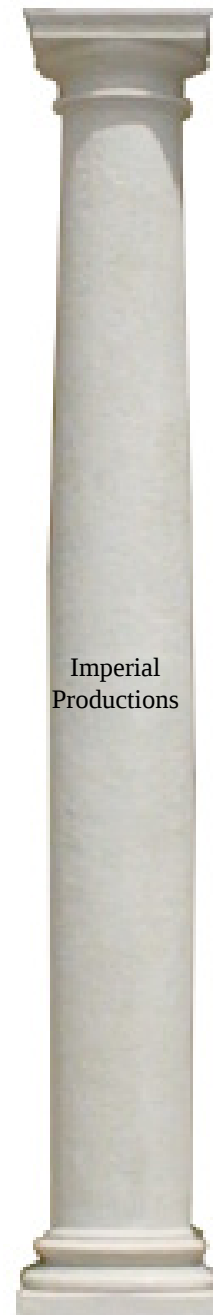

* assembly required, drawing not to scale Loads must be Centered on the Shaft

* Sold as a building Component - Intergration Hardware by others

* For Load Application check with your structural engineer for suitability in your local area

* All specifications subject to change without notice, Final products & Measurements may vary from this brochure E/OE



Imperial Productions®

Imperial Productions & Distribution Inc

email sales@imperialproductions.com

1-800-399-7585 +1-416-264-6096

copyright 2016 MRDCI All Rights Reserved

SEP-25



Custom Request (Download & Fill-in)

emailto sales@imperialproductions.com IPDOR0810S

Name _____

Contact: _____

Phone # _____

Email: _____

Address _____
_____ ZIP/PC _____

FRP-PolyComp™ A Composite Gypsum, Fiberglass, Marble Chips, Prime & Paint by others

(Interior/Exterior)

of Whole Units _____ # of Split Units _____

Type of Split enter Letter _____

Optional Cuts

A

B

C

D



A= Half column

B = 3/4 Outside Corner

C = Wall Cover Engaged

D = 1/4 Column Inside Corner

E = Engaged any percentage

* Possible Limitations due to Quantity Requested and/or Application



Imperial Productions®

1-800-399-7585 +1-416-264-6096

Imperial Productions & Distribution Inc.

email sales@imperialproductions.com copyright 2016 MRDCI All Rights Reserved