




Doric Smooth Tapered IPDOR1012S-FG FRP-PolyComp™

Doric Capital ArchPolymert™

20"
50.8cm

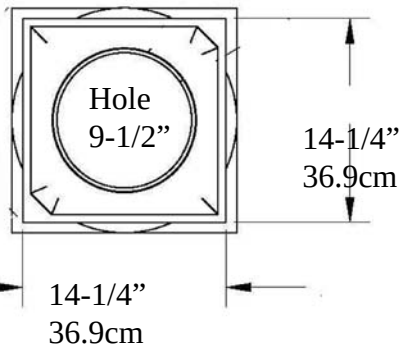

Cap 4-3/8" (11.1cm)=>

Top of Shaft
Minimum
Inside Diameter
8" (20.3cm)

Outside Diameter
9-1/4" (24.4cm)

Bottom of Column
Outside Diameter
11-5/8"
29.5cm


<=

Total
Height

10 Feet
120"
3.048m

Attic Base ArchPolymert™

22-5/8"
57.4cm

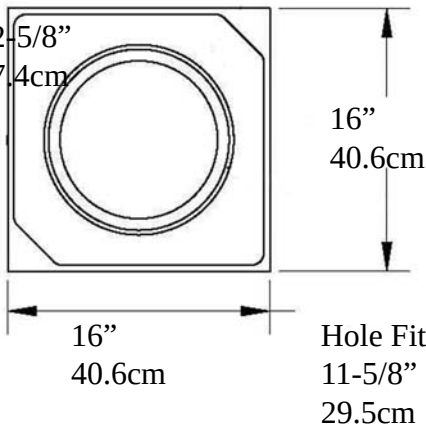


Weight Shaft
132 lb (59.8 Kg)
Center Loads to
18,000lbs (8.16m tons)

Imperial
Productions

<=

<=

Optional Cuts

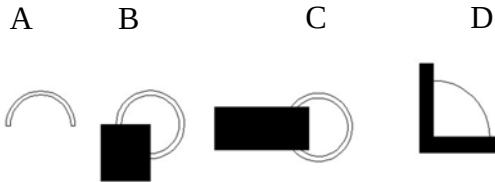

- A= Half column
- B = 3/4 Outside Corner
- C = Wall Cover Engaged
- D = 1/4 Column Inside Corner
- E = Engaged any percentage

Base & Plinth
6-1/2" (16.5cm)

=>

=>

- * assembly required, drawing not to scale Loads must be Centered on the Shaft
- * Sold as a building Component - Intergration Hardware by others
- * For Load Application check with your structural engineer for suitability in your local area
- * All specifications subject to change without notice, Final products & Measurements may vary from this brochure E/OE



Imperial Productions®

Imperial Productions & Distribution Inc

email sales@imperialproductions.com

1-800-399-7585 +1-416-264-6096

copyright 2016 MRDCI All Rights Reserved

SEP-25



Custom Request (Download & Fill-in)

emailto sales@imperialproductions.com IPDOR1012S

Name _____

Contact: _____

Phone # _____

Email: _____

Address _____
_____ ZIP/PC _____

FRP-PolyComp™ A Composite Gypsum, Fiberglass, Marble Chips, Prime & Paint by others

(Interior/Exterior)

of Whole Units _____ # of Split Units _____

Type of Split enter Letter _____

Optional Cuts

A

B

C

D



A = Half column

B = 3/4 Outside Corner

C = Wall Cover Engaged

D = 1/4 Column Inside Corner

E = Engaged any percentage

* Possible Limitations due to Quantity Requested and/or Application



Imperial Productions®

1-800-399-7585 +1-416-264-6096

Imperial Productions & Distribution Inc.

email sales@imperialproductions.com copyright 2016 MRDCI All Rights Reserved