




Doric Smooth Tapered IPDOR1212S-FG FRP-PolyComp™

Doric Capital ArchPolymert™

20"
50.8cm

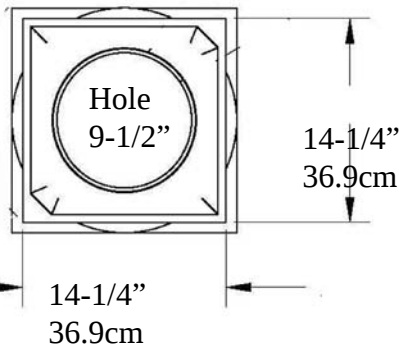

Cap 4-3/8" (11.1cm)=>


Top of Shaft
Minimum
Inside Diameter
8" (20.3cm)

Outside Diameter
9-1/4" (24.4cm)

Bottom of Column
Outside Diameter
11-5/8"
29.5cm

Attic Base ArchPolymert™

22-5/8"
57.4cm

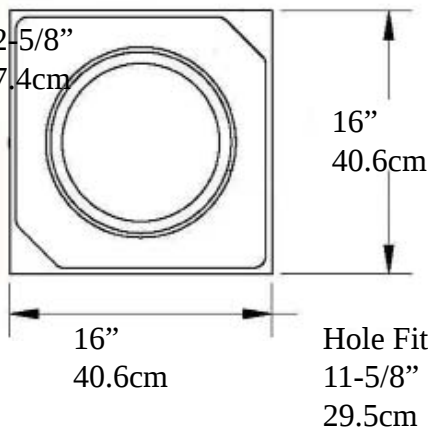

Hole Fits
11-5/8"
29.5cm

Weight Shaft
157 lb (71.2 Kg)
Center Loads to
18,000lbs (8.16m tons)

<=


Total
Height

12 Feet
144"
3.657m

Imperial
Productions

<=

Optional Cuts

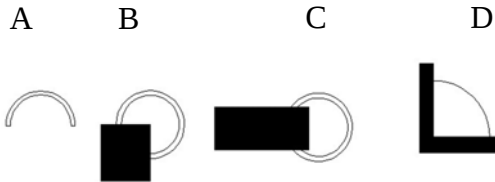

A= Half column

B = 3/4 Outside Corner

C = Wall Cover Engaged

D = 1/4 Column Inside Corner

E = Engaged any percentage

Base & Plinth
6-1/2" (16.5cm)

=>

=>

* assembly required, drawing not to scale Loads must be Centered on the Shaft

* Sold as a building Component - Intergration Hardware by others

* For Load Application check with your structural engineer for suitability in your local area

* All specifications subject to change without notice, Final products & Measurements may vary from this brochure E/OE



Imperial Productions®

Imperial Productions & Distribution Inc

email sales@imperialproductions.com

1-800-399-7585 +1-416-264-6096

copyright 2016 MRDCI All Rights Reserved

SEP-25



Custom Request (Download & Fill-in)

emailto sales@imperialproductions.com IPDOR1212S

Name _____

Contact: _____

Phone # _____

Email: _____

Address _____
_____ ZIP/PC _____


FRP-PolyComp™ A Composite Gypsum, Fiberglass, Marble Chips, Prime & Paint by others

(Interior/Exterior)

of Whole Units _____ # of Split Units _____

Type of Split enter Letter _____

Optional Cuts

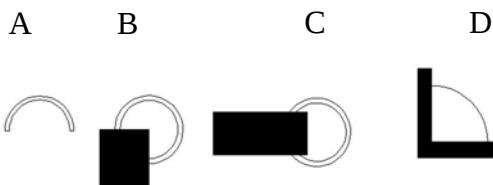

A = Half column

B = 3/4 Outside Corner

C = Wall Cover Engaged

D = 1/4 Column Inside Corner

E = Engaged any percentage

* Possible Limitations due to Quantity Requested and/or Application



Imperial Productions®

1-800-399-7585 +1-416-264-6096

Imperial Productions & Distribution Inc.

email sales@imperialproductions.com copyright 2016 MRDCI All Rights Reserved