
Tuscan Column Tapered IPTUS1018S-TCTB Fiberglass



Weight Shaft 163 lb (73.9 Kg) Centered Load to 20,000lbs (9.07m tons)

- * assembly required, drawing not to scale Loads must be Centered on the Shaft
- * Sold as a building Component Intergration Hardware by others
- * For Load Application check with your structural engineer for suitability in your local area
- * All specifications subject to change without notice, Final products & Measurements may vary from this brochure E/OE

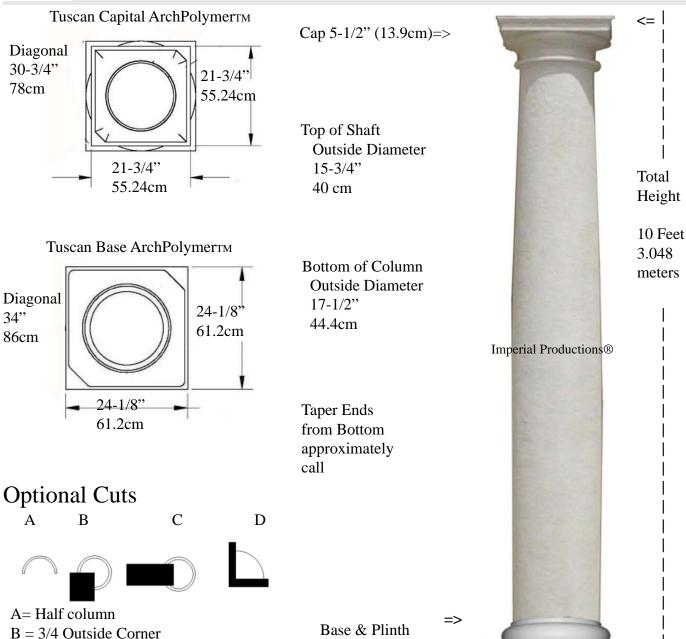

C = Wall Cover Engaged

D = 1/4 Column Inside Corner

E = Engaged any percentage

=>

10-1/8" (25.71cm)

Name	
Contact:	
Phone #	
Email:	
Address	
	ZIP/PC
FRP-PolyCompTM A Composite Gypun	n, Fiberglass, Marble Chips, Prime & Paint by others
(Interior/Exterior)	
# of Whole Units	# of Split Units
	Type of Split enter Letter

Optional Cuts

A B C I



A= Half column

B = 3/4 Outside Corner

C = Wall Cover Engaged

D = 1/4 Column Inside Corner

E = Engaged any percentage

^{*} Possible Limitations due to Quantity Requested and/or Application

