
## $I_{\mathbf{P}}$

## Tuscan Non Tapered Column IPTUS1208SNT-TCTB FiberComp<sub>TM</sub>

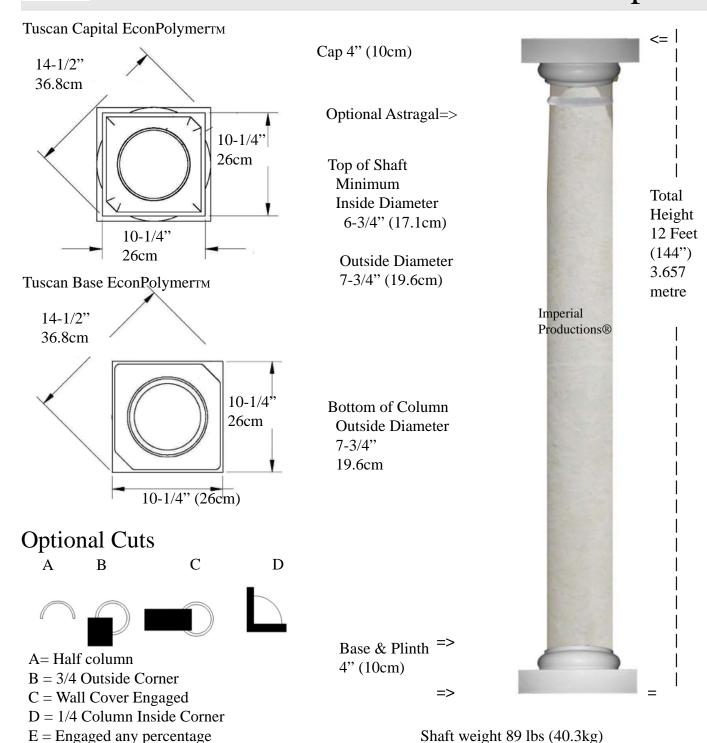

and on the Chaft

Center Loads to 10,000lbs (4.53m tons)

\* assembly required, drawing not to scale Loads must be Centered on the Shaft

\* Sold as a building Component - Intergration Hardware by others

\* For Load Application check with your structural engineer for suitability in your local area

\* All specifications subject to change without notice, Final products & Measurements may vary from this brochure E/OE





Name	
Contact:	
Phone #	
Email:	
Address	
	7ID/DC
FRP-PolyComptm A Composite Gypum, Fibe	rglass, Marble Chips, Prime & Paint by others
(Interior/Exterior) # of Whole Units	# of Split Units
	Type of Split enter Letter

Optional Cuts

A B C D

A= Half column

B = 3/4 Outside Corner

C = Wall Cover Engaged

D = 1/4 Column Inside Corner

E = Engaged any percentage

\* Possible Limitations due to Quantity Requested and/or Application

