




Tuscan Tapered Column

IPTUS2422S-TCTB Fiberglass

Tuscan Capital ArchPolymertTM

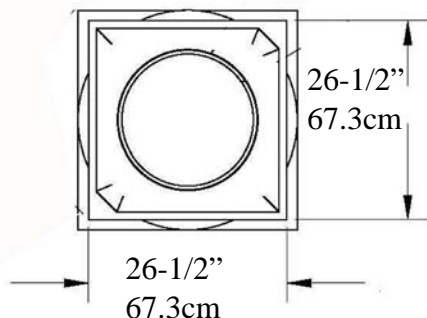

Cap 6-3/8" (16.1cm)=>

Top of Shaft

Outside Diameter


18-1/2"

46.9cm

<=

Total
Height

Tuscan Base ArchPolymertTM

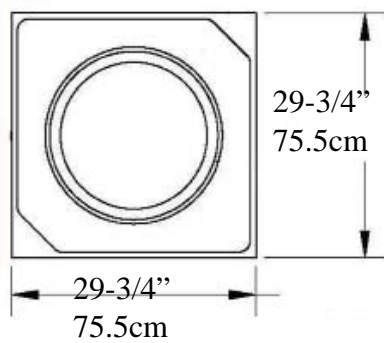

Bottom of Column

Outside Diameter

21-1/2"


54.6cm

24 Feet
7.315
meters

Imperial Productions®

Taper Ends
from Bottom
approximately
95"
241.3 meters

Optional Cuts

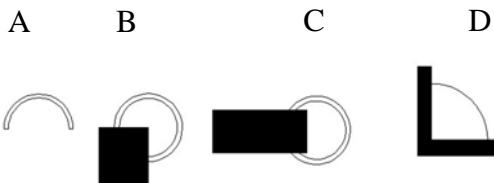

A= Half column

B = 3/4 Outside Corner

C = Wall Cover Engaged

D = 1/4 Column Inside Corner

E = Engaged any percentage

Base & Plinth =>

12-1/8" (30.7cm)

=>



<=

Weight Shaft 458 lb (207.75 Kg)
Centered Load to 20,000lbs (9.07m tons)

- * assembly required, drawing not to scale Loads must be Centered on the Shaft
- * Sold as a building Component - Intergration Hardware by others
- * For Load Application check with your structural engineer for suitability in your local area
- * All specifications subject to change without notice, Final products & Measurements may vary from this brochure E/OE



Imperial Productions®

Imperial Productions & Distribution Inc

email sales@imperialproductions.com copyright 2016 MRDCI All Rights Reserved

1-800-399-7585 +1-416-264-6096

SEP-25



Custom Request (Download & Fill-in)

sales@imperialproductions.com IPTUS2422S-TCTB

Name _____

Contact: _____

Phone # _____

Email: _____

Bill to Address _____
_____ ZIP/PC _____

Ship to Address _____
_____ ZIP/PC _____

All deliveries shipped with insurance

Specify the type of Delivery Required Enter Letter => _____

a) Residential

b) Residential with tailgate

c) Commercial with Loading Dock

d) Commercial Curbside Delivery

A) Whole How Many _____

B) Split for Post Wrap How Many _____

To Wrap Round Post Size _____ Square Post Size _____

How are they split _____

C) Split for Pilaster How Many _____

* Possible Limitations due to Quantity Requested and/or Application



Imperial Productions®

Imperial Productions & Distribution Inc.

email sales@imperialproductions.com copyright 2016 MRDCI All Rights Reserved

1-800-399-7585 +1-416-264-6096