

## Fiberglass

<= C1 =>

Shaft (A) 7-1/2" x 7-1/2" (19 x 19cm)

Capital Width & Depth (C1) 10-1/8" x 10-1/8" (25.7 x 25.7cm) Capital Height (C2) 2-7/8" (7.3cm)

Base Width & Depth (B1) 10-3/8" x 10-3/8" (26.35 x 26.35cm) Base Height (B2) 4-1/4" (10.7cm)


Weight 29 lb (13.15 kg) Load Bearing to 10,000 (4.53 metric tons) Load must be distributed evenly over the shaft

minimum Inside 6" x 6" (15.2 x 15.2cm)


Priming & Painting by others

B2 =>



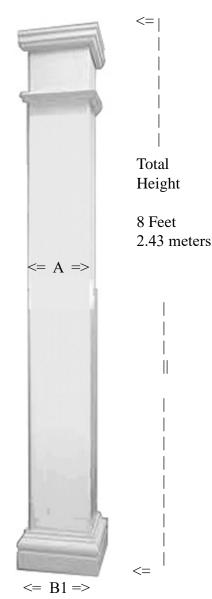

**Optional Splits** 

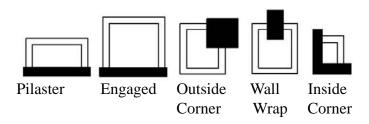

- \* Assembly required, drawing not to scale, final measurements may vary due to manufacturing tolerences
- \* For Load Bearing Application, consult with your structural engineer for suitability in your local area sold as unfinished building components - integration hardware by others \* All specifications subject to change without notice

## Request for Quote IPTUSQ0808S Download and Auto Fill PDF

Name / Company	
Phone Email _	
Billing Address	
City	State / Prov
ZIP / PCode	
Ship to Address	
City	State / Prov
ZIP / PCode	_
Quantity Whole	
Split Post Wrap Split for Pilaster	
Split for Engaged Split	Wall Wrap
Split Outside Corner Split Inside Corner	
Note:	