

## Fiberglass

Shaft (A) 11-1/2" x 11-1/2" 29.21 x 29.21cm

C2 => =>

Capital Width & Depth (C1) 15-7/8" x 15-7/8" (40.3 x 40.3cm) Capital Height (C2) 3-3/4" (9.5cm)


Base Width & Depth (B1) 15" x 15" (38.1 x 38.1cm) Base Height (B2) 5-3/4" (14.6cm)


Weight 48 lbs (21.7kg) Load Bearing to 10,000 (4.53 metric tons) Load must be distributed evenly over the shaft

Minimum Inside 10" x 10" (25.4cm x 25.4cm)

Priming & Painting by others

Optional Split for Post Wrap

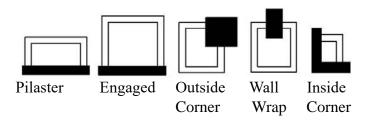

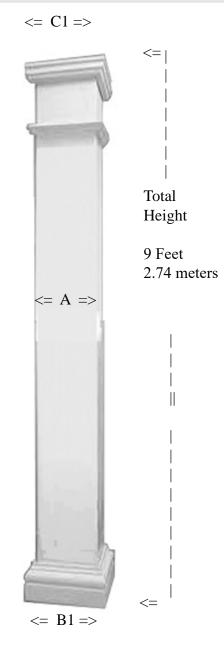

- \* Assembly required, drawing not to scale, final measurements may vary due to manufacturing tolerences E&OE
- \* For Load Bearing Application, consult with your structural engineer for suitability in your local area sold as unfinished building components integration hardware by others \* All specifications subject to change without notice

B2 =>

## Request for Quote IPTUSQ0912S Download and Auto Fill PDF

Name / Company	
Phone Email	
Billing Address	
City	State / Prov
ZIP / PCode	_
Ship to Address	
City	State / Prov
ZIP / PCode	-
Quantity Whole	
Split Post Wrap Split for Pilaster	
Split for Engaged Split	Wall Wrap
Split Outside Corner Split Inside Corner	
Note:	