



Tuscan Smooth Square

IPTUSQ1010S-TCTB

Fiberglass

Shaft (A)

9-1/2" x 9-1/2" (24.13 x 24.13cm)

Capital Width & Depth (C1)

12-7/8" x 12-7/8" (32.7 x 32.7cm)

Capital Height (C2)

3-5/8" (9.2cm)

Base Width & Depth (B1)

13-1/8" x 13-1/8" (33.3 x 33.3cm)

Base Height (B2)

5-1/4" (13.3cm)

Weight 45 lb (20.4 kg)



Load Bearing to 10,000 (4.53 metric tons)

Load must be distributed evenly over the shaft

Minimum Inside 9-1/2" x 9-1/2" (24.1 x 24.1cm)

Priming & Painting by others

Optional Split for Post Wrap

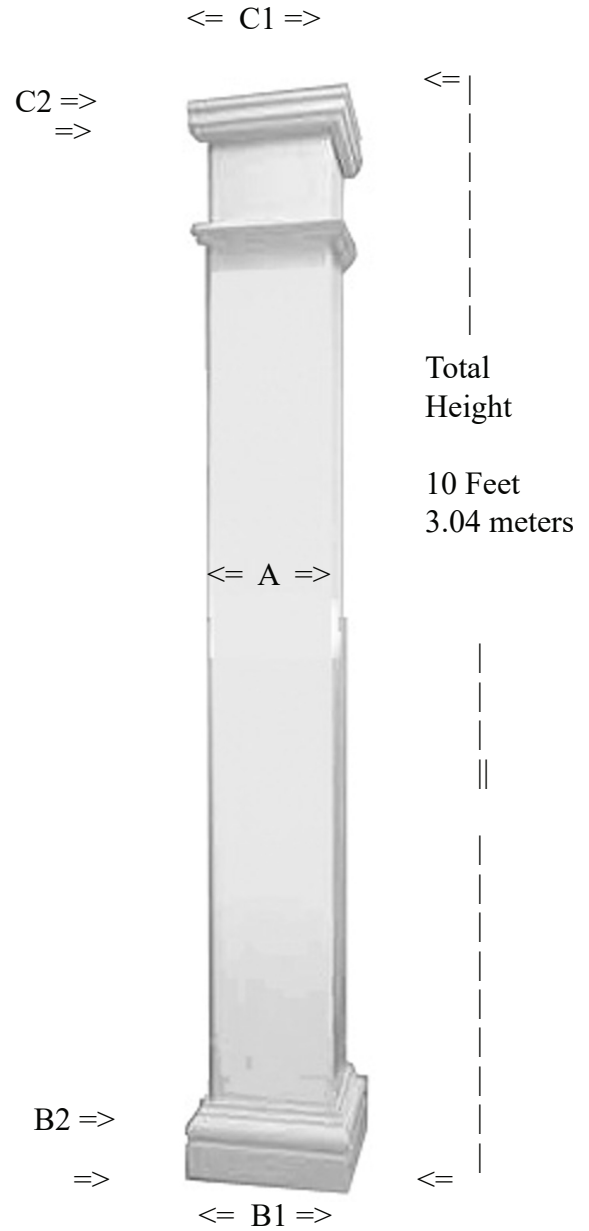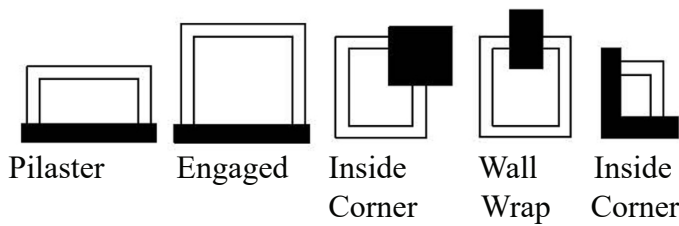

* Assembly required, drawing not to scale, final measurements may vary due to manufacturing tolerances

* For Load Bearing Application, consult with your structural engineer for suitability in your local area sold as unfinished building components - integration hardware by others * All specifications subject to change without notice



Imperial Productions®

1-800-399-7585 +1-416-264-6096

Imperial Productions & Distribution Inc

APR-26

email sales@imperialproductions.com copyright 2016 MRDCI All Rights Reserved



Custom Request (Download & Fill-in)

emailto sales@imperialproductions.com

IPTUSQ1010S-TCTB

Name _____

Contact: _____

Phone # _____

Email: _____

Address _____

ZIP/PC _____

MATERIAL SELECTION

Fiberglass Whole

of Units _____

Fiberglass Split for Post Wrap

of Units _____

Fiberglass Split for Pilaster Application

of Units _____



Imperial Productions®

1-800-399-7585 +1-416-264-6096

Imperial Productions & Distribution Inc.

email sales@imperialproductions.com copyright 2016 MRDCI All Rights Reserved