



Tuscan Smooth Square IPTUSQ1014S-TCTB

Fiberglass

Shaft (A)

13-1/2" x 13-1/2" (34.29 x 34.29cm)

Capital Width & Depth (C1)

19-1/4" x 19-1/4" (48.89 x 48.89cm)

Capital Height (C2)

4-3/4" (12cm)

Base Width & Depth (B1)

19-3/8" x 19-3/8" (49.2 x 49.2cm)

Base Height (B2)

7-3/4" (19.68cm)

Weight 63 lb (28.5 kg)



Load Bearing to 10,000 (4.53 metric tons)

Load must be distributed evenly over the shaft

Minimum Inside 12" x 12" (30.48cm x 30.48cm)

Priming & Painting by others

Optional Split for Post Wrap

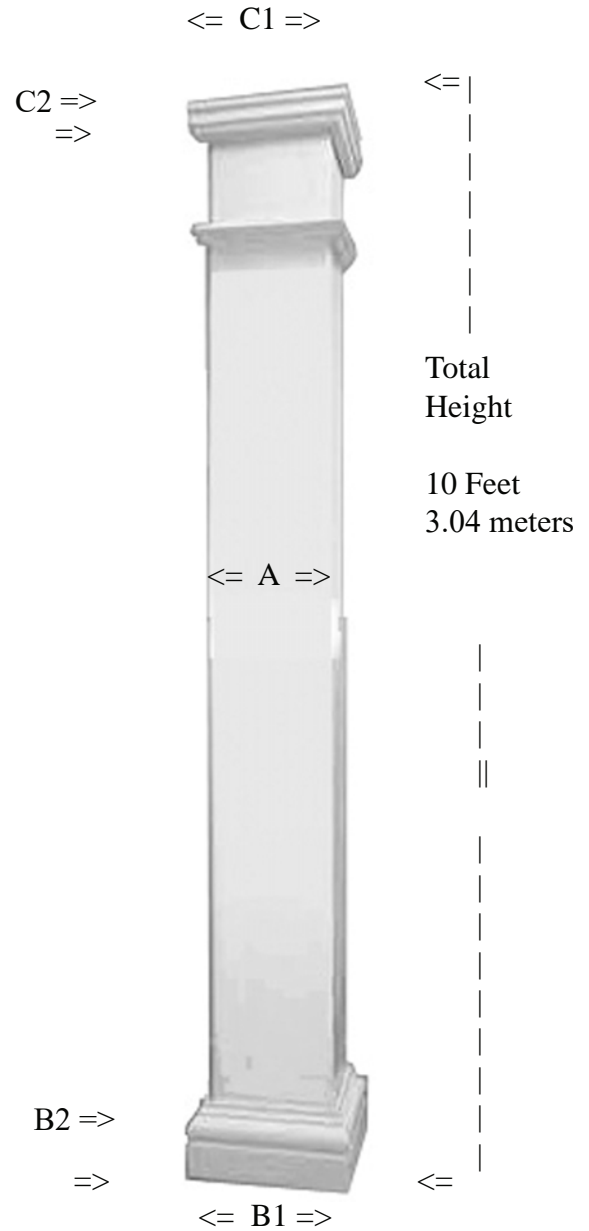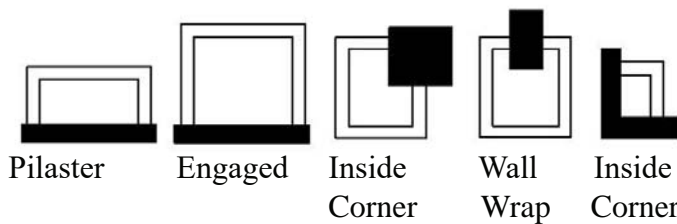

* Assembly required, drawing not to scale, final measurements may vary due to manufacturing tolerances

* For Load Bearing Application, consult with your structural engineer for suitability in your local area sold as unfinished building components - integration hardware by others * All specifications subject to change without notice



Imperial Productions®

1-800-399-7585 +1-416-264-6096

Imperial Productions & Distribution Inc

APR-26

email sales@imperialproductions.com copyright 2016 MRDCI All Rights Reserved



Custom Request (Download & Fill-in)

emailto sales@imperialproductions.com

IPTUSQ1014S-TCTB

Name _____

Contact: _____

Phone # _____

Email: _____

Address _____

ZIP/PC _____

MATERIAL SELECTION

Fiberglass Whole

of Units _____

Fiberglass Split for Post Wrap

of Units _____

Fiberglass Split for Pilaster Application

of Units _____



Imperial Productions®

1-800-399-7585 +1-416-264-6096

Imperial Productions & Distribution Inc.

email sales@imperialproductions.com copyright 2016 MRDCI All Rights Reserved