



Tuscan Smooth Square

IPTUSQ1016S-TCTB

Fiberglass

Shaft (A)

15-1/2" x 15-1/2" (39.37 x 39.37cm)

Capital Width & Depth (C1)

23" x 23" (58.42 x 58.42cm)

Capital Height (C2)

5-1/2" (13.9cm)

Base Width & Depth (B1)

21-1/2" x 21-1/2" (54.6 x 54.6cm)

Base Height (B2)

8-1/4" (20.95cm)

Weight 74 lb (33.56 kg)



Load Bearing to 12,500 (5.66 metric tons)

Load must be distributed evenly over the shaft

Minimum Inside 14" x 14" (35.56cm x 35.56cm)

Priming & Painting by others

Optional Split for Post Wrap

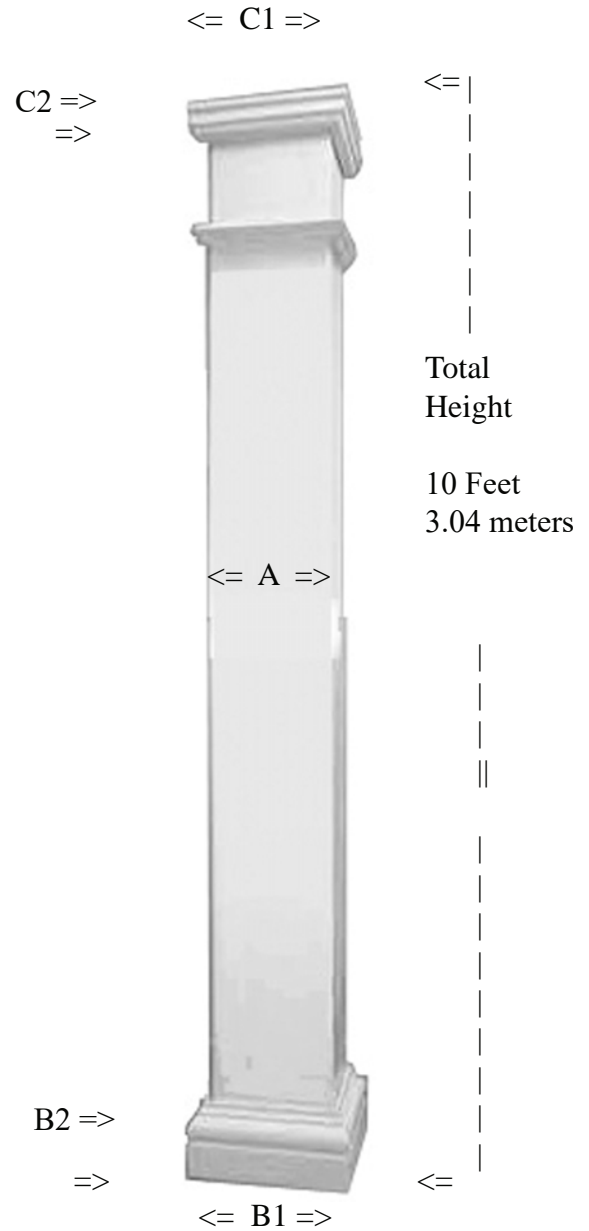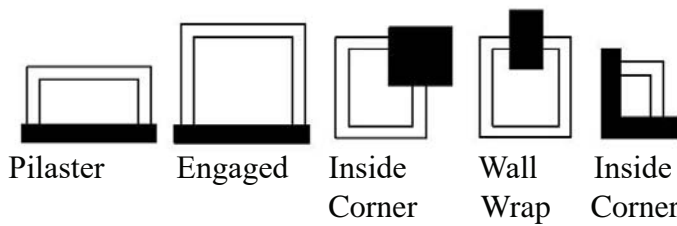

* Assembly required, drawing not to scale, final measurements may vary due to manufacturing tolerances

* For Load Bearing Application, consult with your structural engineer for suitability in your local area
sold as unfinished building components - integration hardware by others * All specifications subject to change without notice



Imperial Productions®

1-800-399-7585 +1-416-264-6096

Imperial Productions & Distribution Inc

APR-26

email sales@imperialproductions.com copyright 2016 MRDCI All Rights Reserved



Custom Request (Download & Fill-in)

emailto sales@imperialproductions.com

IPTUSQ1016S-TCTB

Name _____

Contact: _____

Phone # _____

Email: _____

Address _____

ZIP/PC _____

MATERIAL SELECTION

Fiberglass Whole

of Units _____

Fiberglass Split for Post Wrap

of Units _____

Fiberglass Split for Pilaster Application

of Units _____



Imperial Productions®

1-800-399-7585 +1-416-264-6096

Imperial Productions & Distribution Inc.

email sales@imperialproductions.com copyright 2016 MRDCI All Rights Reserved