



Tuscan Smooth Square

IPTUSQ1210S-TCTB

Fiberglass

Shaft (A)

9-1/2" x 9-1/2" (24.13 x 24.13cm)

Capital Width & Depth (C1)

12-7/8" x 12-7/8" (32.7 x 32.7cm)

Capital Height (C2)

3-5/8" (9.2cm)

Base Width & Depth (B1)

13-1/8" x 13-1/8" (33.3 x 33.3cm)

Base Height (B2)

5-1/4" (13.3cm)

Weight 54 lb (24.24 kg)



Load Bearing to 10,000 (4.53 metric tons)

Load must be distributed evenly over the shaft

Minimum Inside 9-1/2" x 9-1/2" (24.1 x 24.1cm)

Priming & Painting by others

Optional Split for Post Wrap

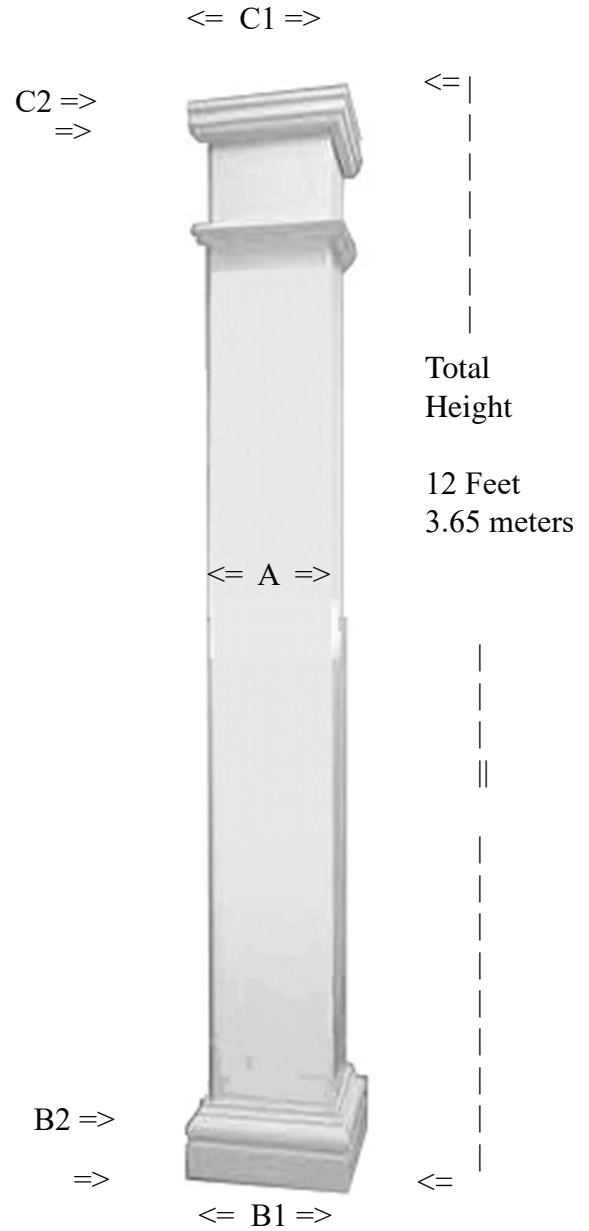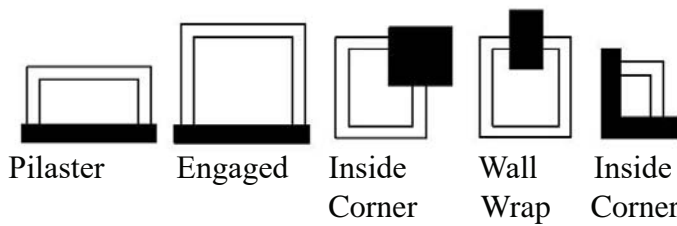

* Assembly required, drawing not to scale, final measurements may vary due to manufacturing tolerances

* For Load Bearing Application, consult with your structural engineer for suitability in your local area sold as unfinished building components - integration hardware by others * All specifications subject to change without notice



Imperial Productions®

1-800-399-7585 +1-416-264-6096

Imperial Productions & Distribution Inc.

email sales@imperialproductions.com copyright 2016 MRDCI All Rights Reserved

AUG-25



Request for Quote IPTUSQ1210S

Download and Auto Fill PDF

Name / Company _____

Phone _____ Email _____

Billing Address _____

City _____ State / Prov _____

ZIP / PCode _____

Ship to Address _____

City _____ State / Prov _____

ZIP / PCode _____

Quantity Whole _____

Split Post Wrap _____ Split for Pilaster _____

Split for Engaged _____ Split Wall Wrap _____

Split Outside Corner _____ Split Inside Corner _____

Note: _____



Imperial Productions®

1-800-399-7585 +1-416-264-6096

Imperial Productions & Distribution Inc.

email sales@imperialproductions.com copyright 2016 MRDCI All Rights Reserved

AUG-25