



Tuscan Smooth Square

IPTUSQ1614S-TCTB

Fiberglass

Shaft (A)

13-1/2" x 13-1/2" (34.29 x 34.29cm)

Capital Width & Depth (C1)

19-1/4" x 19-1/4" (48.89 x 48.89cm)

Capital Height (C2)

4-3/4" (12cm)

Base Width & Depth (B1)

19-3/8" x 19-3/8" (49.2 x 49.2cm)

Base Height (B2)

7-3/4" (19.68cm)

Weight 101 lb (45.8 kg)



Minimum Load Bearing to 10,000 (4.53 metric tons)

Load must be distributed evenly over the shaft

Minimum Inside 12" x 12" (30.48cm x 30.48cm)

Priming & Painting by others

Optional Split for Post Wrap

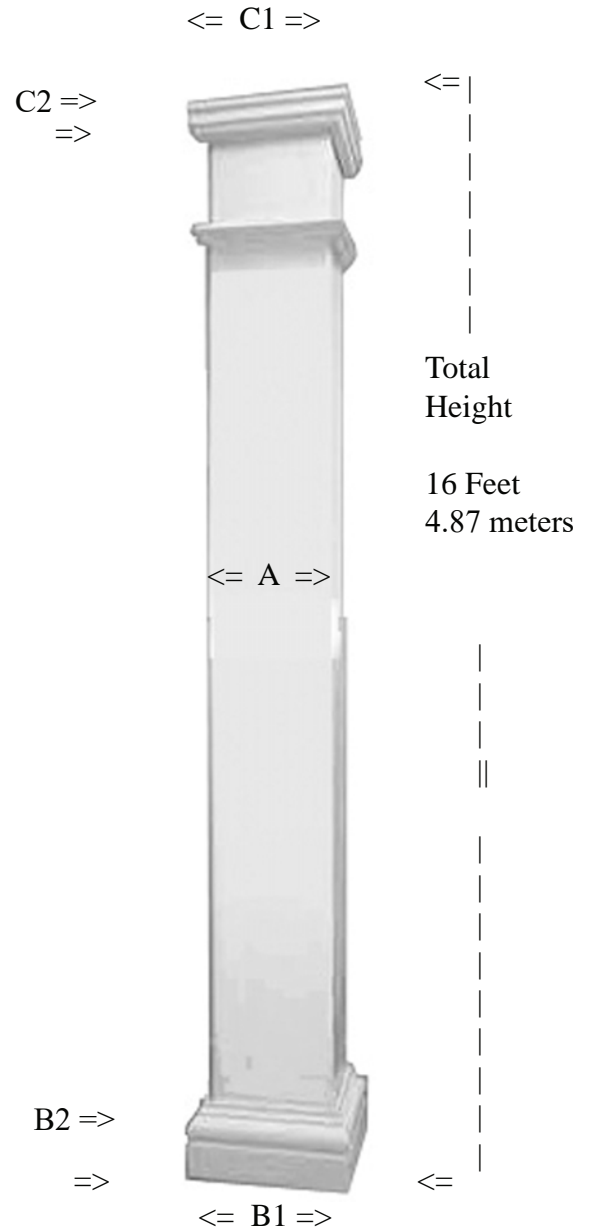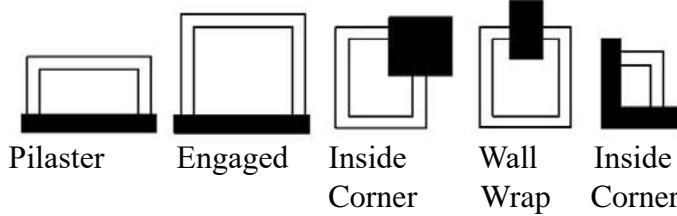

* Assembly required, drawing not to scale, final measurements may vary due to manufacturing tolerances

* For Load Bearing Application, consult with your structural engineer for suitability in your local area
 sold as unfinished building components - integration hardware by others * All specifications subject to change without notice



Imperial Productions®

1-800-399-7585 +1-416-264-6096

Imperial Productions & Distribution Inc.

email sales@imperialproductions.com copyright 2016 MRDCI All Rights Reserved

AUG-25



Request for Quote IPTUSQ1614S

Download and Auto Fill PDF

Name / Company _____

Phone _____ Email _____

Billing Address _____

City _____ State / Prov _____

ZIP / PCode _____

Ship to Address _____

City _____ State / Prov _____

ZIP / PCode _____

Quantity Whole _____

Split Post Wrap _____ Split for Pilaster _____

Split for Engaged _____ Split Wall Wrap _____

Split Outside Corner _____ Split Inside Corner _____

Note: _____



Imperial Productions®

1-800-399-7585 +1-416-264-6096

Imperial Productions & Distribution Inc.

email sales@imperialproductions.com copyright 2016 MRDCI All Rights Reserved

AUG-25