


Imperial Productions® Mouldings **IPNP4272**

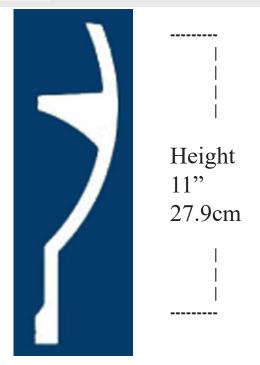


Depth: 2-3/4" (10.16cm)

Straight Lengths 96" (243.84cm) Curves Available in GRG

ArchPolymertm Non-Fire Rated LED Lights by others

GRG-NeoPlastertm Class A FireRated Not Heat Sensitive

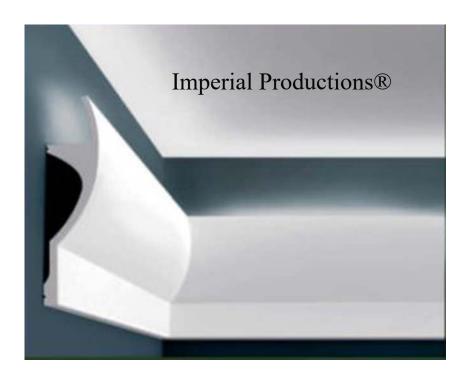

Ships World Wide

* All specifications subject to change without notice, Final products & Measurements may vary from this brochure




Name	1
Contact:	
Phone #	
Email:	
Address	
ZIP/PC	
MATERIAL SELECTION	
ArchPolymerTM A synthetic Plaster, White Primed Ready to Paint (Interior/Exterior) # of Feet for Residential # of FireRated Feet for Commercial	
GRG-NeoPlasterTM A new age plaster, Class A fire rated (Interior) # of Feet	
ResinMold® A Synaptic polymer for Curves & Arches, Class A fire rated See Next Page	
VALUE ADDED FINISHES	
Factory Paint Color Code Finish	_
Metal Coated: Type:	


^{*} Possible Limitations due to Quantity Requested and/or Application



Profile: IPNP4004 Flexible ResinMold®

1) ARCH - True 1/2 Circle & Eyebrow **Elevation Drawing**

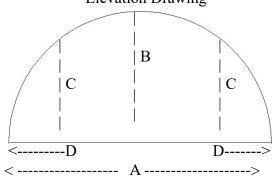






Please Provide Inside Crown Measurements

D= Distance to Side from C Number of Arches:

2) CIRCLE

Diameter A



or Circumference

of Circles _____



3) CURVED WALL Plan View Drawings

Convex Wall

A = Depth =

|-----| Length of Curve

Length of Curve

Concave Wall

 $A = Depth = \underline{\hspace{1cm}}$

4) STRAIGHT LENGTHS

Total Feet (Meters) Required: _____

5) ORIENTATION circle one



