




Cylinder Non-Tapered Smooth

IPCYL0808S-PC FRP-PolyComp™



Optional Cuts

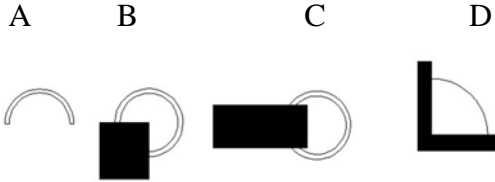

- A= Half column
- B = 3/4 Outside Corner
- C = Wall Cover Engaged
- D = 1/4 Column Inside Corner
- E = Engaged any percentage

Top of Shaft
 Minimum
 Inside Diameter
 6-3/4" (17.1cm)

Outside Diameter
 7-3/4" (19.6cm)

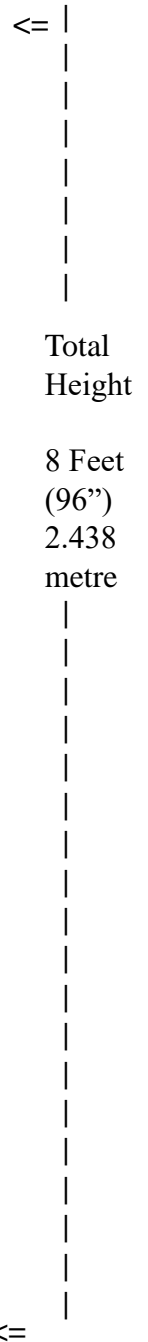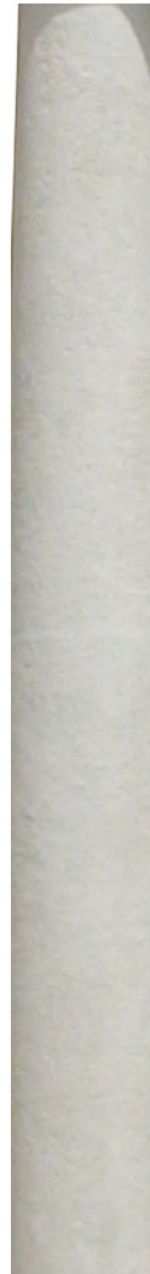

Bottom of Column
 Outside Diameter
 7-3/4"
 19.6cm

Shaft weight 61 lbs (27.6kg)
 Center Loads to 10,000lbs (4.53m tons)

* *assembly required, drawing not to scale*
 * *For Load Application check with your structural engineer for suitability in your local area*
 * All specifications subject to change without notice, Final products & Measurements may vary from this brochure





Custom Request (Download & Fill-in)

sales@imperialproductions.com IPCYL0808S-PC

Name _____

Contact: _____

Phone # _____

Email: _____

Address _____
_____ ZIP/PC _____

FRP-PolyComp™ A Composite Gypum, Fiberglass, Marble Chips, Prime & Paint by others

(Interior/Exterior)

of Whole Units _____ # of Split Units _____

Type of Split enter Letter _____

Optional Cuts

A B C D



A= Half column

B = 3/4 Outside Corner

C = Wall Cover Engaged

D = 1/4 Column Inside Corner

E = Engaged any percentage

* Possible Limitations due to Quantity Requested and/or Application



Imperial Productions®

1-800-399-7585 +1-416-264-6096

Imperial Productions & Distribution Inc.

email sales@imperialproductions.com copyright 2016 MRDCI All Rights Reserved