




# Cylinder Non-Tapered Smooth

## IPCYL0810S-PC FRP-PolyComp™



### Optional Cuts

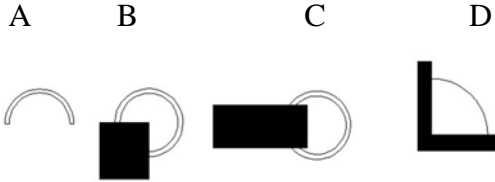

- A= Half column
- B = 3/4 Outside Corner
- C = Wall Cover Engaged
- D = 1/4 Column Inside Corner
- E = Engaged any percentage

Top of Shaft  
Minimum  
Inside Diameter  
8-3/4" (22.2cm)

Outside Diameter  
9-3/4" (27.7cm)

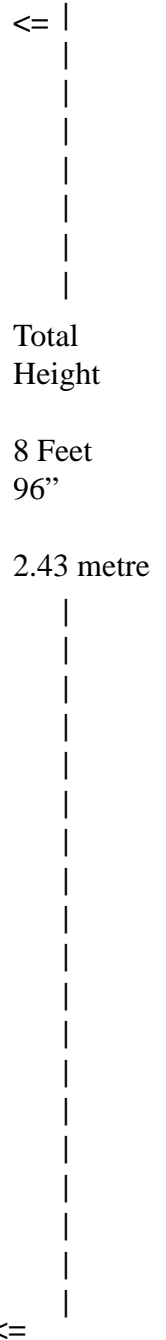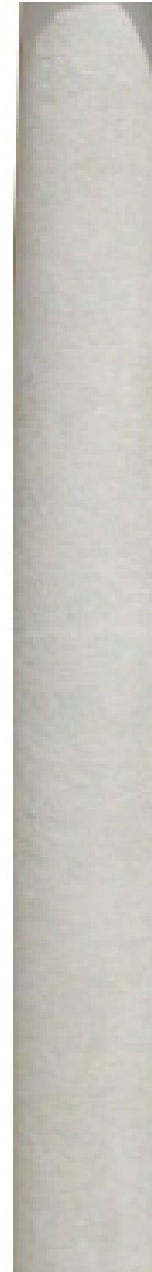

Bottom of Column  
Outside Diameter  
9-3/4"  
27.7cm

Shaft weight 100 lbs (45.3kg)  
Center Loads to 14,000lbs (6.35m tons)

\* *assembly required, drawing not to scale*  
 \* *For Load Application check with your structural engineer for suitability in your local area*  
 \* All specifications subject to change without notice, Final products & Measurements may vary from this brochure





# Custom Request (Download & Fill-in)

sales@imperialproductions.com IPCYL0810S-PC

Name \_\_\_\_\_

Contact: \_\_\_\_\_

Phone # \_\_\_\_\_

Email: \_\_\_\_\_

Address \_\_\_\_\_  
\_\_\_\_\_ ZIP/PC \_\_\_\_\_

FRP-PolyComp™ A Composite Gypum, Fiberglass, Marble Chips, Prime & Paint by others

(Interior/Exterior)

# of Whole Units \_\_\_\_\_ # of Split Units \_\_\_\_\_

Type of Split enter Letter \_\_\_\_\_

## Optional Cuts

A      B                  C                  D



A= Half column

B = 3/4 Outside Corner

C = Wall Cover Engaged

D = 1/4 Column Inside Corner

E = Engaged any percentage

\* Possible Limitations due to Quantity Requested and/or Application



Imperial Productions®

1-800-399-7585 +1-416-264-6096

Imperial Productions & Distribution Inc.

email sales@imperialproductions.com copyright 2016 MRDCI All Rights Reserved