



Smooth Cylinder IPCYL0914S-FG Fiberglass

Outside Diameter
13-5/8" (34.6cm)

Inside Diameter
11" (27.9cm)

No Seams, Reveals or Astragal

Load Bearing to 20,000lbs
9.07m tons

Split Shafts are not Load Bearing



1/4 Column
Inside Corner




Wall Cover
Engaged



3/4"
Outside Corner



1/2 Column
Engaged

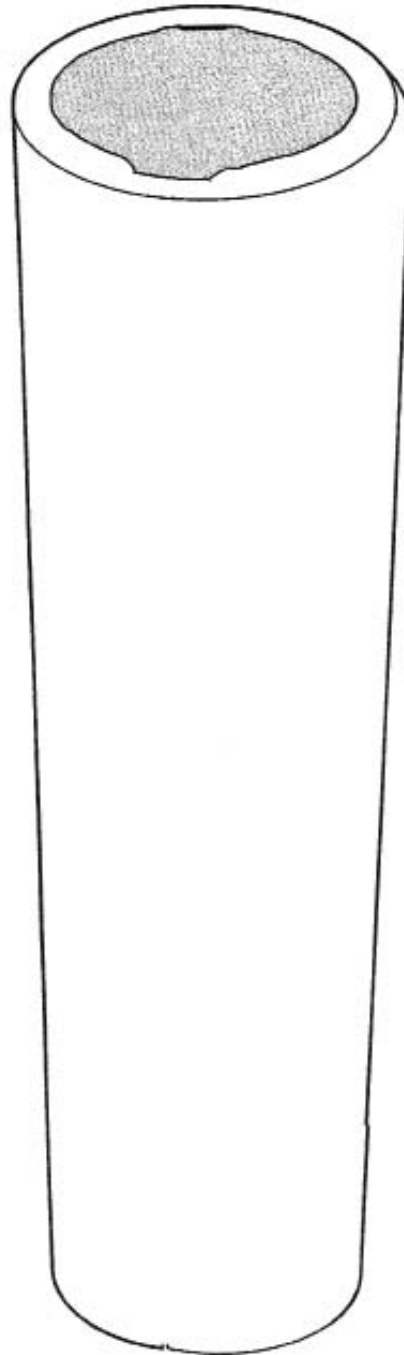

<=

Total
Height

9 Feet
(108")

2.74m

<=

** assembly required, drawing not to scale*

** For Load Bearing Application, check with your structural engineer for suitability in your local area*

** All specifications subject to change without notice, Final products & Measurements may vary from this brochure*



Imperial Productions®

1-800-399-7585 +1-416-264-6096

Imperial Productions & Distribution Inc.

email sales@imperialproductions.com copyright 2016 MRDCI All Rights Reserved

SEP-24



Custom Request (Download & Fill-in)

sales@imperialproductions.com IPCYL0914S-FG

Name _____

Contact: _____

Phone # _____

Email: _____

Address _____
_____ ZIP/PC _____

FRP-PolyComp™ A Composite Gypum, Fiberglass, Marble Chips, Prime & Paint by others

(Interior/Exterior)

of Whole Units _____ # of Split Units _____

Type of Split enter Letter _____

Optional Cuts

A B C D



A= Half column

B = 3/4 Outside Corner

C = Wall Cover Engaged

D = 1/4 Column Inside Corner

E = Engaged any percentage

* Possible Limitations due to Quantity Requested and/or Application



Imperial Productions®

1-800-399-7585 +1-416-264-6096

Imperial Productions & Distribution Inc.

email sales@imperialproductions.com copyright 2016 MRDCI All Rights Reserved