Smooth Cylinder
IPCYL0916S-FG Fiberglass

Outside Diameter
15-1/2” (39.7cm)
Inside Diameter
12-1/2” (31.7cm)
No Seams, Reveals or Astragal

Load Bearing to 20,000lbs
9.07m tons
Split Shafts are not Load Bearing

1/4 Column
Inside Corner



Wall Cover
Engaged



3/4”
Outside Corner

1/2 Column
Engaged

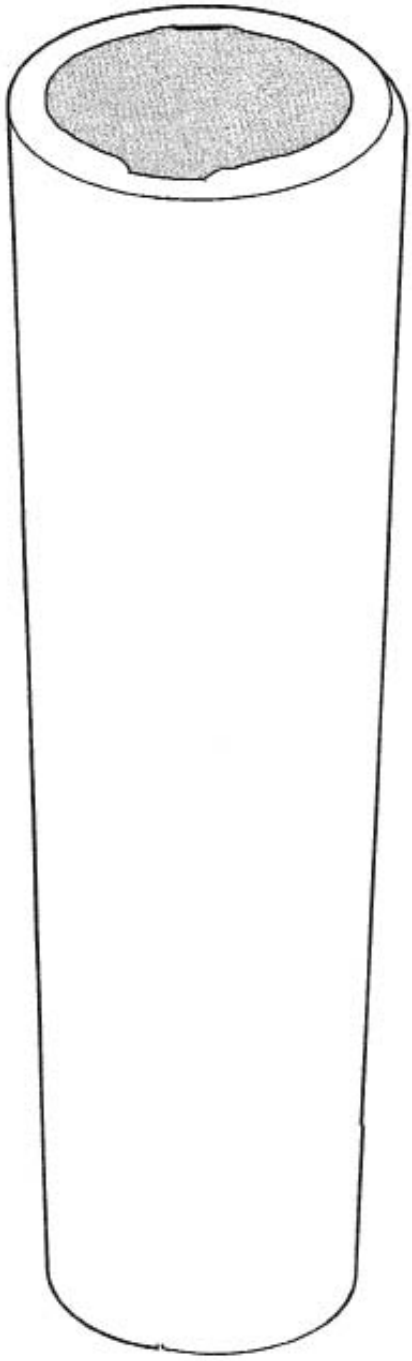

<= Total Height

9 Feet
(108”)

2.74m

<=

**** drawing not to scale***

**** For Load Bearing Application, check with your structural engineer for suitability in your local area***

* All specifications subject to change without notice, Final products & Measurements may vary from this brochure

Imperial Productions® 1-800-399-7585 +1-416-264-6096
Imperial Productions & Distribution Inc.
email sales@imperialproductions.com
copyright 2016 MRDCI All Rights Reserved
SEP-24

Custom Request (Download & Fill-in)

sales@imperialproductions.com IPCYL0916S-PC

Name _____

Contact: _____

Phone # _____

Email: _____

Address _____

_____ZIP/PC _____

FRP-PolyComp™ A Composite Gypum, Fiberglass, Marble Chips, Prime & Paint by others

(Interior/Exterior)

# of Whole Units _____ # of Split Units _____

Type of Split enter Letter_____

Optional Cuts

A B C D

A= Half column
B = 3/4 Outside Corner
C = Wall Cover Engaged
D = 1/4 Column Inside Corner
E = Engaged any percentage

* Possible Limitations due to Quantity Requested and/or Application

Imperial Productions® 1-800-399-7585 +1-416-264-6096
Imperial Productions & Distribution Inc.
email sales@imperialproductions.com copyright 2016 MRDCI All Rights Reserved