




Cylinder Non-Tapered Smooth

IPCYL1010S-PC FRP-PolyComp™


Optional Cuts

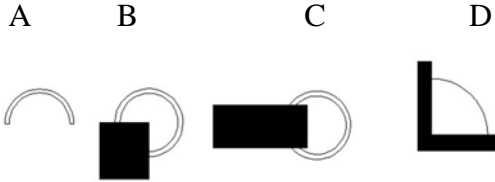

- A= Half column
- B = 3/4 Outside Corner
- C = Wall Cover Engaged
- D = 1/4 Column Inside Corner
- E = Engaged any percentage

Top of Shaft
Minimum
Inside Diameter
8-3/4" (22.2cm)

Outside Diameter
9-3/4" (27.7cm)

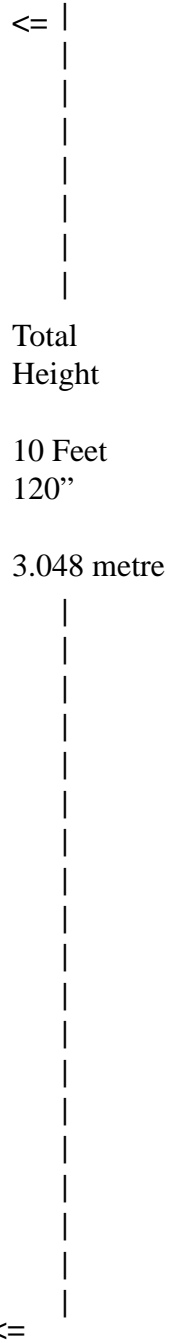

Bottom of Column
Outside Diameter
9-3/4"
27.7cm

Shaft weight 111 lbs (50.4kg)
Center Loads to 14,000lbs (6.35m tons)

* *assembly required, drawing not to scale*
 * *For Load Application check with your structural engineer for suitability in your local area*
 * All specifications subject to change without notice, Final products & Measurements may vary from this brochure





Custom Request (Download & Fill-in)

sales@imperialproductions.com IPCYL1010S-PC

Name _____

Contact: _____

Phone # _____

Email: _____

Address _____
_____ ZIP/PC _____

FRP-PolyComp™ A Composite Gypum, Fiberglass, Marble Chips, Prime & Paint by others

(Interior/Exterior)

of Whole Units _____ # of Split Units _____

Type of Split enter Letter _____

Optional Cuts

A B C D



A= Half column

B = 3/4 Outside Corner

C = Wall Cover Engaged

D = 1/4 Column Inside Corner

E = Engaged any percentage

* Possible Limitations due to Quantity Requested and/or Application



Imperial Productions®

1-800-399-7585 +1-416-264-6096

Imperial Productions & Distribution Inc.

email sales@imperialproductions.com copyright 2016 MRDCI All Rights Reserved